

## SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

25 - 100 mm ( 1 - 4" ) Expansion Gaps

# Maxatec 140 : A07-A09

## Features

### Surface

Ribbed surface for greater movement

### Movement

High movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day



-

-

-

-

-

## System Options

Gap width(s)	25, 50, 75, 100 mm
Height(s)	18 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets

# SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

25 - 100 mm ( 1 - 4" ) Expansion Gaps

## Maxatec 140 : A07-A09


### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Wall - Wall	25	± 6	[12]	-	-	-	-	18	-	70	200	140-A07-025
	50	± 12	[25]	-	-	-	-			87	217	140-A07-050
	75	± 20	[40]	-	-	-	-			111	241	140-A07-075
	100	± 25	[50]	-	-	-	-			136	266	140-A07-100
Corner Wall	25	± 6	[12]	-	-	-	-	18	58	70	136	140-A09-025
	50	± 12	[25]	-	-	-	-			86	152	140-A09-050
	75	± 20	[40]	-	-	-	-			111	176	140-A09-075
	100	± 25	[50]	-	-	-	-			136	201	140-A09-100

Maxatec 140 : A07

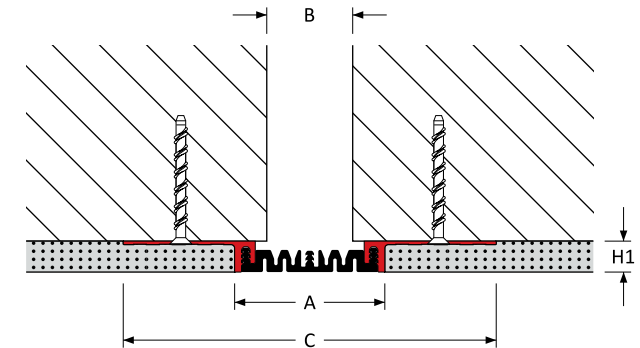

Maxatec 140 : A09

