

SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

25 - 100 mm (1 - 4") Expansion Gaps

Maxatec 150 : A07-A09

Features

Surface

Surface mounted
Ribbed surface for greater movement

Movement

High movement capacity
ASTM E-1399 Class I: Thermal
Class II: Wind

Traffic Frequency per day



- - - - -

System Options

Gap width(s)	25, 50, 75, 100 mm
Height(s)	16 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall


25 - 100 mm (1 - 4") Expansion Gaps

Maxatec 150 : A07-A09

Expansion Joint Selection Criteria Load Rating Product Details

Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
								H1 (mm)	H2 (mm)	A (mm)	C (mm)	
Wall - Wall	25	± 6	[12]	-	-	-	-	16	-	189	70	150-A07-025
	50	± 12	[25]	-	-	-	-			206	87	150-A07-050
	75	± 20	[40]	-	-	-	-			230	111	150-A07-075
	100	± 25	[50]	-	-	-	-			255	136	150-A07-100
Corner Wall	25	± 6	[12]	-	-	-	-	16	58	129	70	150-A09-025
	50	± 12	[25]	-	-	-	-			147	89	150-A09-050
	75	± 20	[40]	-	-	-	-			170	111	150-A09-075
	100	± 25	[50]	-	-	-	-			196	136	150-A09-100

Maxatec 150 : A07

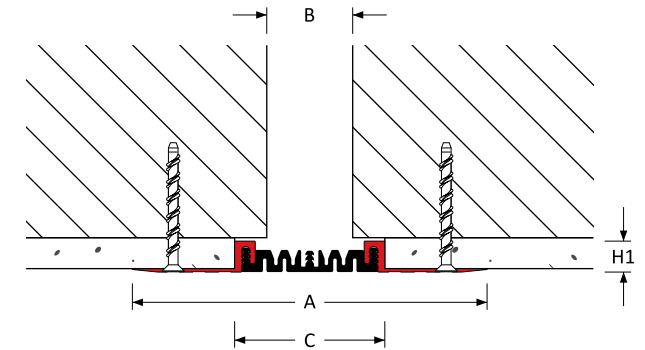

Maxatec 150 : A09

