

MULTI-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall
50 - 200 mm (2 - 8") Expansion Gaps

Maxatec 200 : A01-A02

Features

Surface

Ribbed surface for improved slip resistance
Centre supported and Americans with Disabilities Act (ADA)
compliant across the entire movement cycle

Movement

High movement capacity
ASTM E-1399 Class I: Thermal
Class II: Wind

Traffic Frequency per day

				
> 25,000	≤ 100	≤ 10	≤ 10	-

System Options

Gap width(s)	50, 75, 100, 150, 200 mm
Height(s)	50, 70 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



APPLICATIONS





Airport Terminals | Educational | Exhibition Centres
Department Stores | Distribution & Retail Warehouses
Factories | Hospitals | Museums | Offices & Hotels
Parking | Places of Worship | Residential Buildings
Rail, Metros & Elevated Rail Stations | Roads & Bridges
Shopping Centres | Sports Stadiums | Supermarkets

MULTI-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall
50 - 200 mm (2 - 8") Expansion Gaps


Maxatec 200 : A01-A02

Expansion Joint Selection Criteria Load Rating Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline	Blockout	
						H1 (mm)	H2 (mm)	A (mm)	C (mm)			
Floor - Floor	50	± 12	[25]	5 kN	36 kN	30 kN	-	50: 70	-	338	452	200-A01-050-(H1)
	75	± 18	[37]							411	525	200-A01-075-(H1)
	100	± 25	[50]							436	550	200-A01-100-(H1)
	150	± 37	[75]							548	662	200-A01-150-(H1)
	200	± 50	[100]							658	772	200-A01-200-(H1)
Floor - Wall	50	± 12	[25]	5 kN	36 kN	30 kN	-	50: 70	-	338	395	200-A02-050-(H1)
	75	± 18	[37]							411	468	200-A02-075-(H1)
	100	± 25	[50]							436	493	200-A02-100-(H1)
	150	± 37	[75]							548	605	200-A02-150-(H1)
	200	± 50	[100]							658	715	200-A02-200-(H1)

When specifying or ordering please add the **height (H1)** required to the Product Reference.
For example Maxatec 200 : A01-100-050 denotes a joint 50mm deep sufficient for use with paving up to 20mm deep.

Maxatec 200 : A01

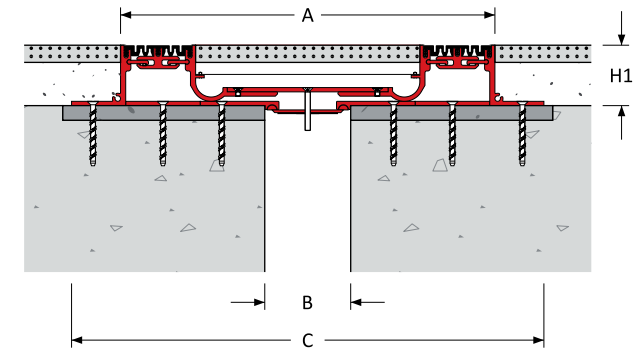

Maxatec 200 : A02

