

## MULTI-SEAL EXPANSION JOINT

Floor to Floor | Floor to Wall  
100 - 150 mm ( 4 - 6" ) Expansion Gaps

# Maxatec 220 : V01-V02

## Features

### Surface

Smooth surface

Americans with Disabilities Act (ADA) compliant across the entire movement cycle

### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day

				
≤ 5,000	-	-	-	-

## System Options

Gap width(s)	100, 150 mm
Height(s)	16 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets


**MULTI-SEAL EXPANSION JOINT**

Floor to Floor | Floor to Wall  
100 - 150 mm ( 4 - 6" ) Expansion Gaps

# Maxatec 220 : V01-V02

Expansion Joint Selection Criteria				Load Rating				Product Details				
Joint Location	Gap Width B(mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Floor - Floor	100	± 25	[50]	-	-	-	-	16	-	237	237	220-V01-100
	150			-	-	-	-		-	289	289	220-V01-150
Floor - Wall	100	± 25	[50]	-	-	-	-	16	70	180	180	220-V02-100
	150			220	220	220-V02-150						

**Maxatec 220 : V01**

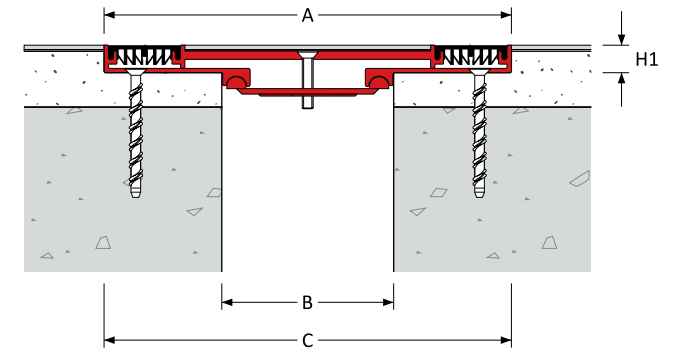

**Maxatec 220 : V02**

