

## CONTROL JOINT

Floor to Floor

3 - 7 mm ( 3/32 - 1/4" ) Joint Width

## Micratec : SE + SV

### Features

#### Surface

Easy transit: Americans with Disabilities Act (ADA) compliant across the entire movement cycle




3mm minimum visible line width between finishes

VAMAC versions of these joints are London Underground Limited 1-085 'Fire Safety Performance of Materials' tested and approved for below ground applications such as metro stations.

#### Movement

Excellent movement capacity for profile width

### Traffic Frequency per day

				
> 25,000	≤ 10,000	≤ 10,000	> 25,000	≤ 1,000

### System Options

Sightline width(s)	3, 5, 7 mm
Height(s)	25, 50, 75, 100 mm
Metal type(s)	304-grade Stainless Steel 316-grade Stainless Steel CZ 108 Brass
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	Not applicable
Waterproofing	Not applicable
Pre-assembly in factory	Not applicable



### APPLICATIONS





Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets


**CONTROL JOINT**

Floor to Floor

3 - 7 mm ( 3/32 - 1/4" ) Joint Width

**Micratec : SE + SV****Expansion Joint Selection Criteria****Load Rating****Product Details**

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline A (mm)	Blockout C (mm)	
								H1 (mm)	H2 (mm)			
Floor - Floor EPDM	-	± 1.0	[2.0]	35 kN	190 kN	30 kN	630 kN	25: 50:	-	3	-	SE-003-(H1)
		± 1.5	[3.0]					75: 100		5		SE-005-(H1)
		± 2.0	[4.0]					7		SE-007-(H1)		
Floor - Floor VAMAC	-	± 1.0	[2.0]	35 kN	190 kN	30 kN	630 kN	25: 50:	-	3	-	SV-003-(H1)
		± 1.5	[3.0]					75: 100		5		SV-005-(H1)
		± 2.0	[4.0]					7		SV-007-(H1)		

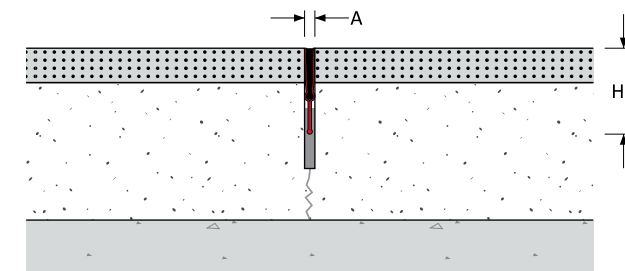

When specifying or ordering please add the **height (H1)** required to the Product Reference.

For example Micratec : SE-005-050 denotes a control joint 50mm high.

When specifying or ordering please select EPDM or VAMAC core colour as black, grey or stone (beige).