

## SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

30 - 75 mm ( 1 1/4 - 3" ) Expansion Gaps

# Maxatec 120 : A07-A09

## Features

### Surface

Smooth surface

### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day



-

-

-

-

-

## System Options

Gap width(s)	30, 50, 75 mm
Height(s)	28 mm
Metal type(s)	6063 T5 & T6 Aluminium
Seal colour(s)	Black (RAL 7021) Grey (RAL 7038) Beige (RAL 1015)
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
Department Stores | Distribution & Retail Warehouses  
Factories | Hospitals | Museums | Offices & Hotels  
Parking | Places of Worship | Residential Buildings  
Rail, Metros & Elevated Rail Stations | Roads & Bridges  
Shopping Centres | Sports Stadiums | Supermarkets

# SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall

30 - 75 mm ( 1 1/4 - 3" ) Expansion Gaps

## Maxatec 120 : A07-A09


### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions				Product Number
		±	[Total]					Height		Sightline A (mm)	Blockout C (mm)	
								H1 (mm)	H2 (mm)			
Wall - Wall	30	± 5	[10]	-	-	-	-	28	-	160	40	120-A07-030
	50	± 10	[20]	-	-	-	-	28	-	191	71	120-A07-050
	75	± 15	[30]	-	-	-	-	28	-	213	93	120-A07-075
Corner Wall	30	± 5	[10]	-	-	-	-	28	50	100	40	120-A09-030
	50	± 10	[20]	-	-	-	-	28	50	131	71	120-A09-050
	75	± 15	[30]	-	-	-	-	28	50	153	93	120-A09-075

Maxatec 120 : A07

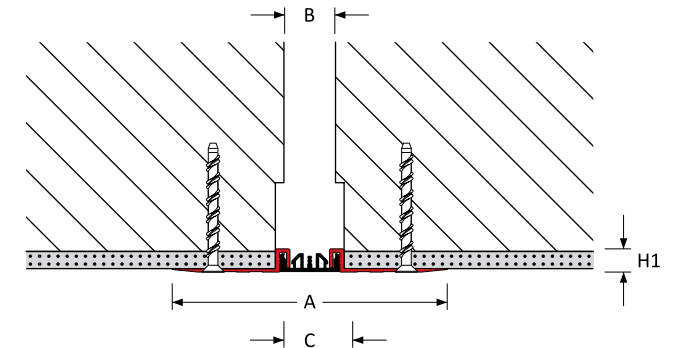

Maxatec 120 : A09

